



LED Strip Series

SH60LA1

SH60JA1



DEMASLED

Application

City lighting, landscape lighting, commercial lighting and house contour lighting,etc.

Features


- 1. Super bright SMD SMD5050 as the light source, good color conformity and no spot.
- 2. Low power consumption.
- 3. Use double-layer roller copper FPC,better heat dissipation and longer lifespan.
- 4. Silicon glue used for waterproof strip, never turn yellow or rigid
- 5. CE , RoHS and UL certified.

Parameters


Item		Parameter
Part Number	SH60LA1	SH60JA1
LED Type	SMD5050	
LEDs/m	60	
Colors	R/G/B/Y/W/RGB	
Beaming Angle(°)	120	
Luminous Flux（lm）	1200	
Voltage（V）	DC12	
Power（W/M）	12	
Dimension（mm）	1000*10	1000*12
Working Tem.（℃）	-25～+60	
Storage Tem.（℃）	-25～+70	
Protection Grade	IP33	IP68

Dimension


Unit:mm

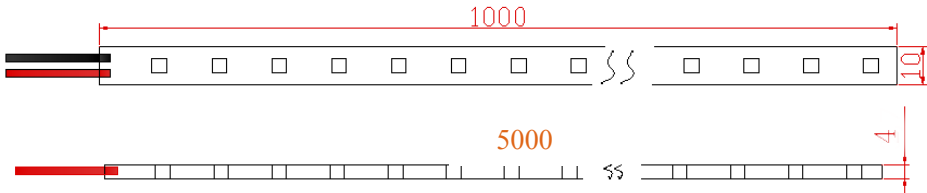

Beaming Angle

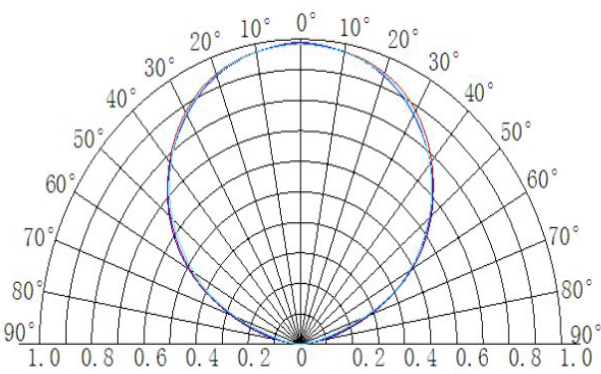

Wire Connection

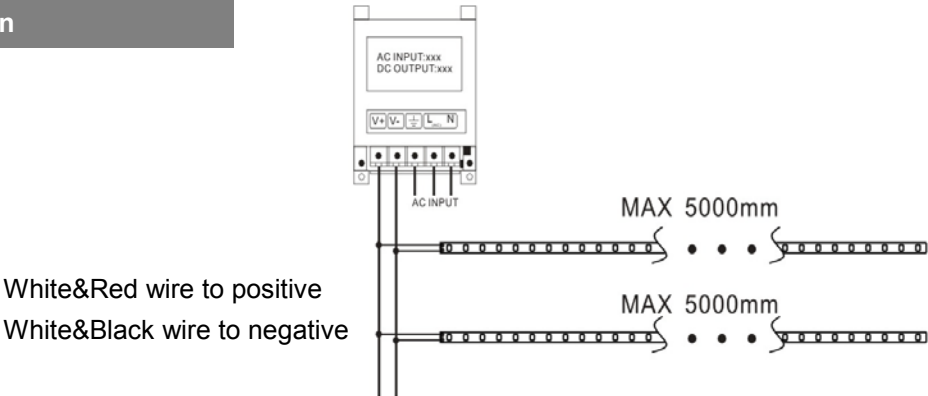

Packing



5M/Roll



antistatic bag



carton

Packing Specification

- 1. Antistatic bag adopted
- 2. Packing information

Part Number	SH60LA1		SH60JA1
Carton dimension(mm)	490*450*220		
Bags per carton(pcs)	100		50
Quantity per carton(m)	500		250
Net Weight(kg)	10.72(1±10%)		19.30(1±10%)
Gross Weight(kg)	11.82(1±10%)		20.50(1±10%)

3. Due to the packing manner difference, please adhere to the original products in case of discrepancy found between the

picture and actual product.

Warning

1. Disassembling or modifying the product is forbidden.
2. Installation with power on is forbidden.
3. Any organic solvent chemical is forbidden.
4. Isolation and corrosion prevention on all wiring points and wire ends.
5. Make sure the power wire is big enough and ensure the voltage and connection are all correct before power on.
6. Installation, maintenance should be done by professional staff.
7. 5M in a serial connection maximum.
8. The power wire between power supply and LED strips should be less than two meters to keep the same brightness on all parts.

Declaration

1. Warranty: 3 years.
2. To ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the staff with the similar qualification.
3. The given data in the specification is the laboratory data, there may be discrepancy found in the actual products.
4. The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
5. The products are subject to change without prior notification.

